





# NORTH MERCER ISLAND/ENATAI Sewer Upgrade Project

## North Mercer Pump Station Construction

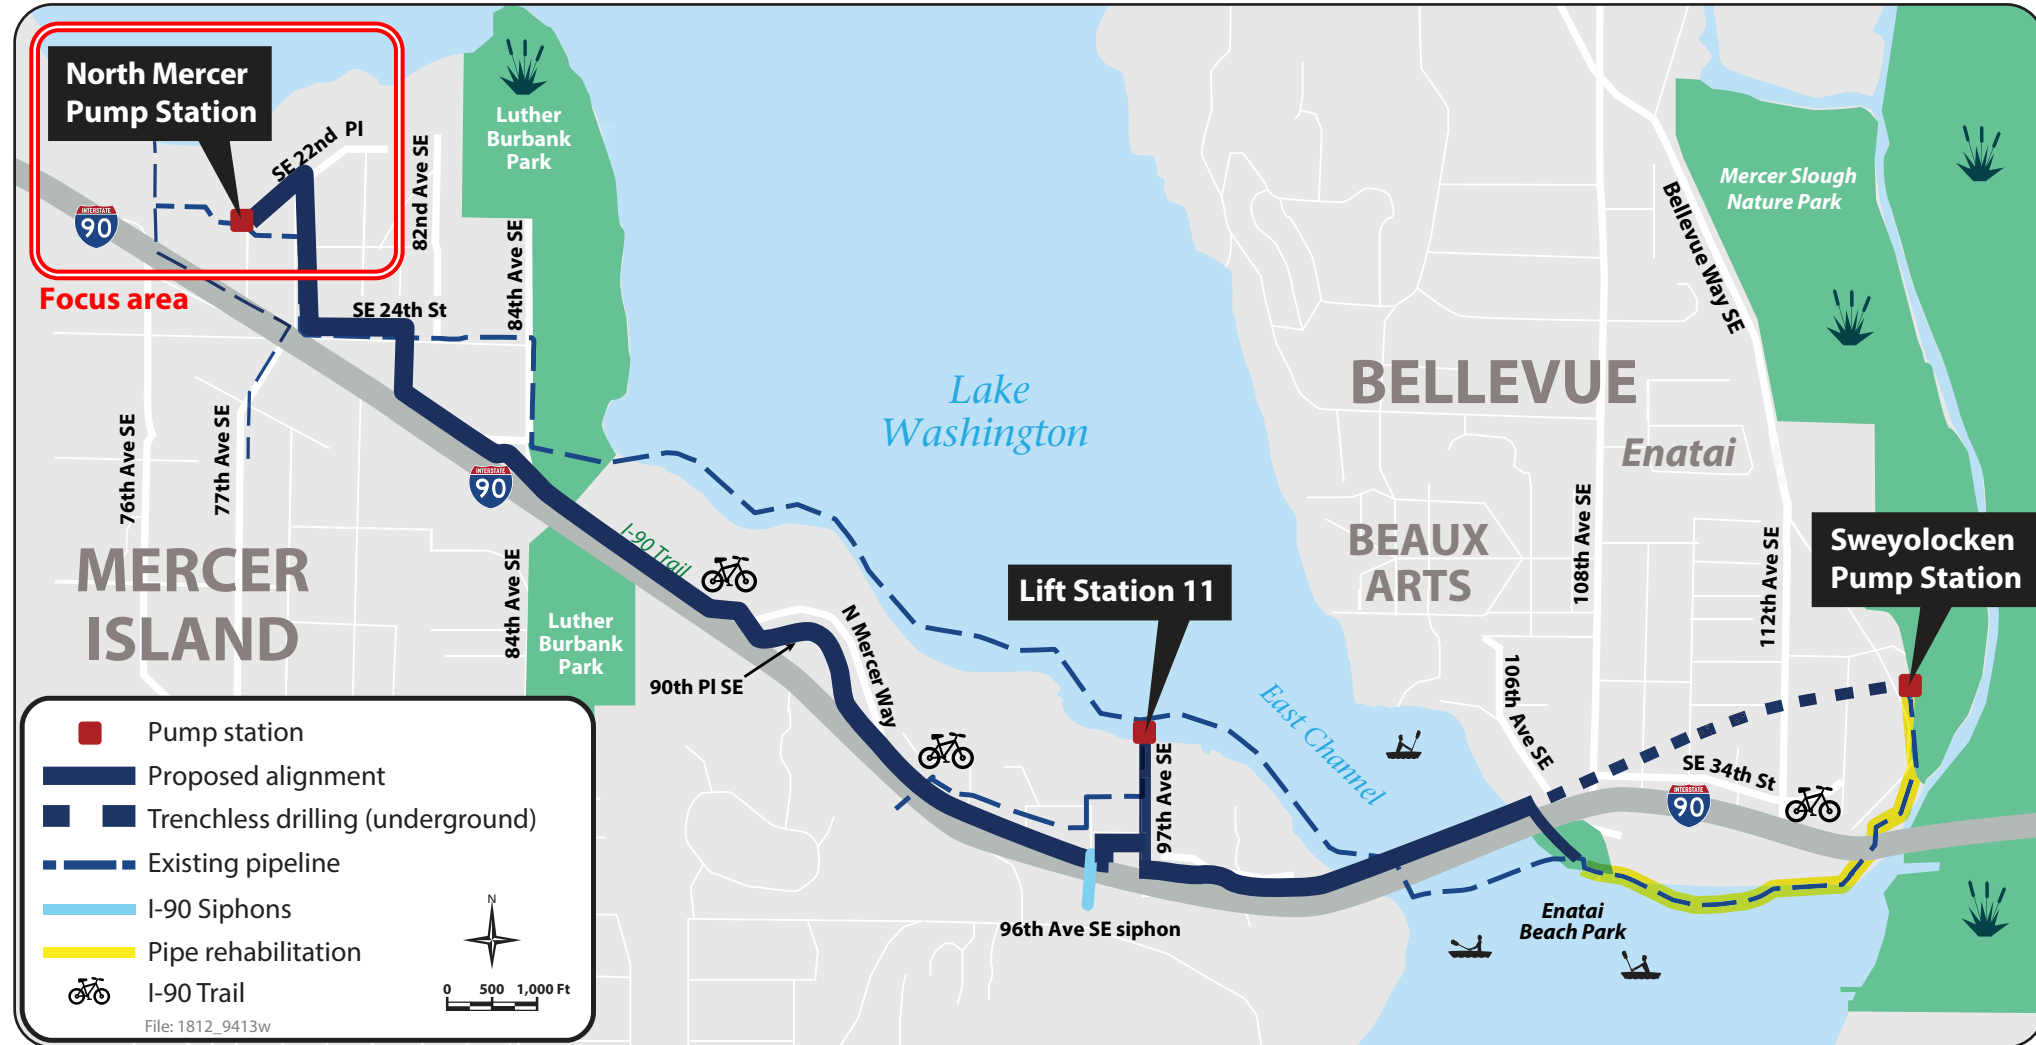

Construction on the pump station will take up to three years. Here is what you can expect:

### The work will generally follow this order:

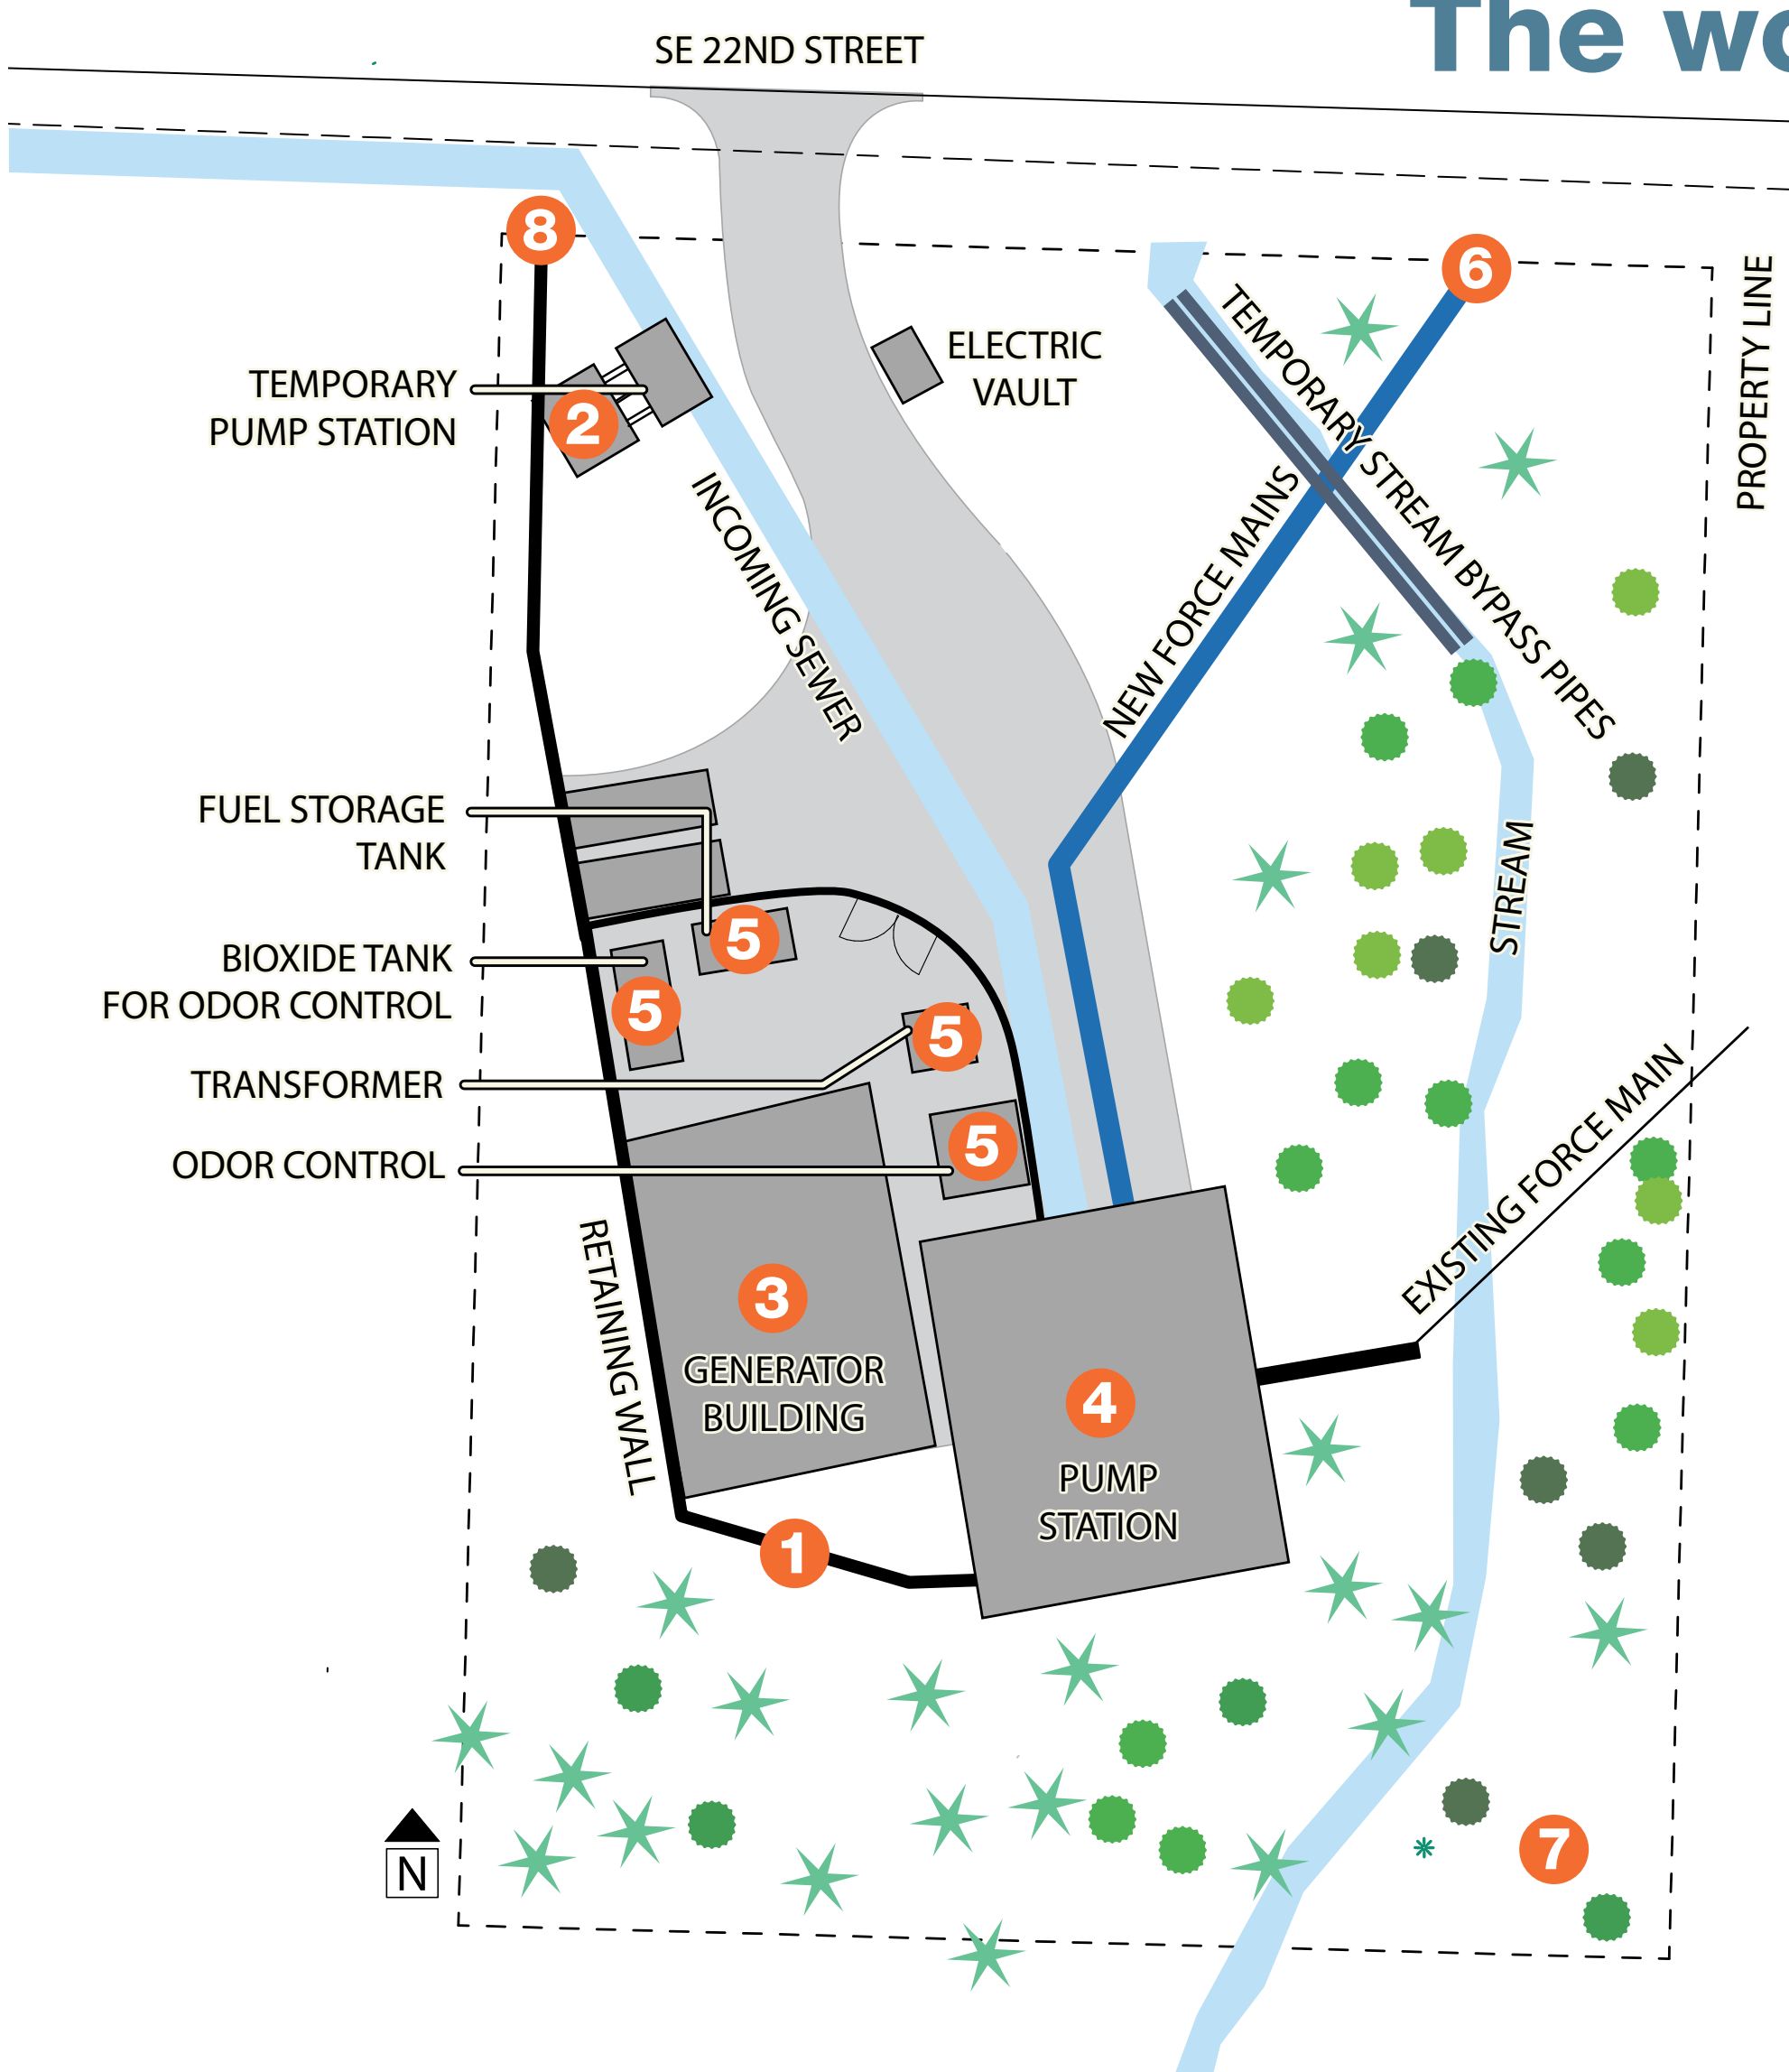

- 1 Install **temporary retaining wall**.
- 2 Build **temporary pump station**.
- 3 Construct **new generator building**.
- 4 Put the temporary pump station into operation, and **upgrade the existing pump station**.
- 5 Install **new odor control facilities, a new transformer, and a fuel tank** for the generator in the courtyard area.
- 6 Install **new force mains** for the pump station to carry pumped sewage to the new North Mercer/Enatai Interceptor system.
- 7 **Begin operation** of the upgraded pump station and remove the temporary pump station. The temporary station will be in service for about a year.
- 7 **Restore the site** to provide screening and landscaping.
- 8 The new **permanent retaining wall** will be built in stages as needed throughout the construction.


The temporary pump station at the northeast corner of the site will have several pieces of equipment. Examples are shown below:



Odor Control



Bioxide Tote

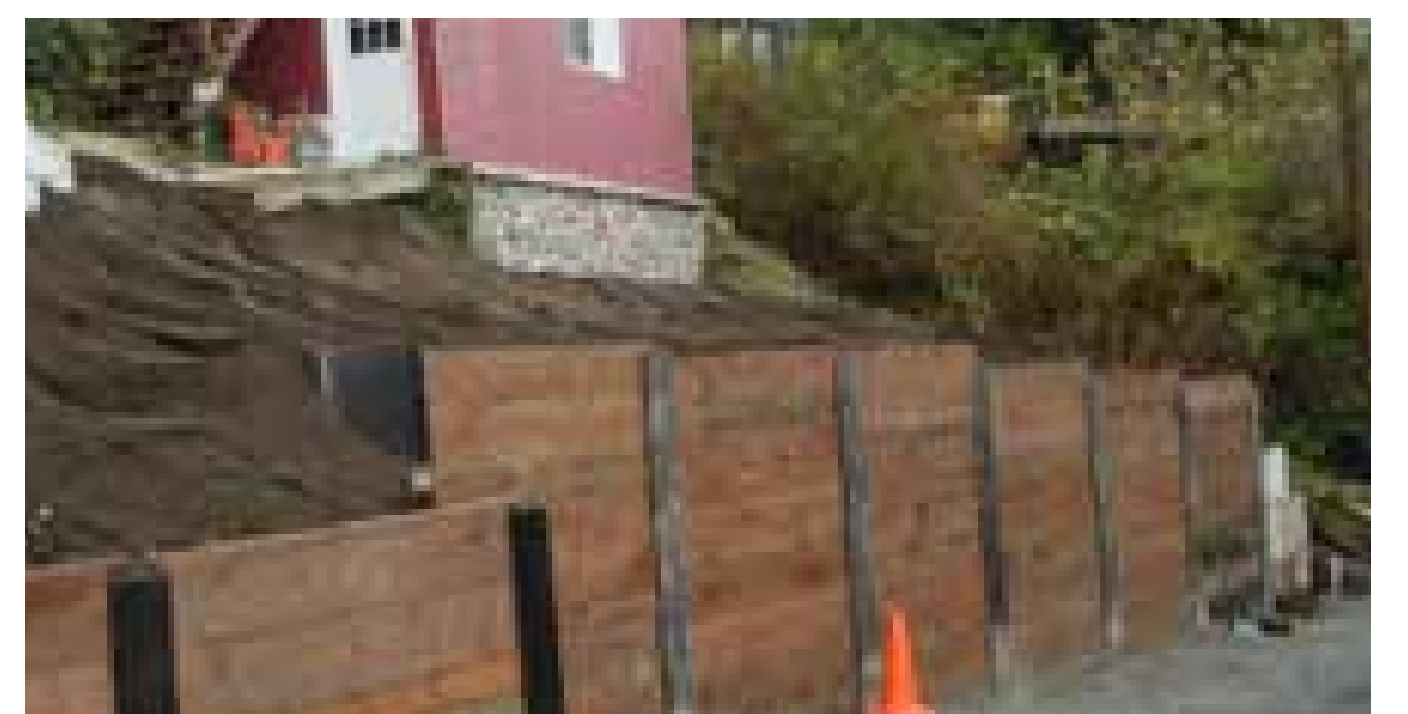

Temporary Wall



Standby Generator



Power & Controls Trailers