




NORTH MERCER ISLAND/ENATAI Sewer Upgrade Project

Mercer Island Boat Launch and Work across the East Channel of Lake Washington – What’s happening?

The pipeline will extend from East Mercer Way on Mercer Island to Enatai Beach Park in Bellevue, in the water just north of the I-90 bridge. The design of the pipeline considered the many public users who could be affected: commercial and recreational boat traffic in the lake; nearby shoreline property owners with docks on the lake; and the users of the Mercer Island Boat Launch on the west side and Bellevue’s Enatai Beach Park.

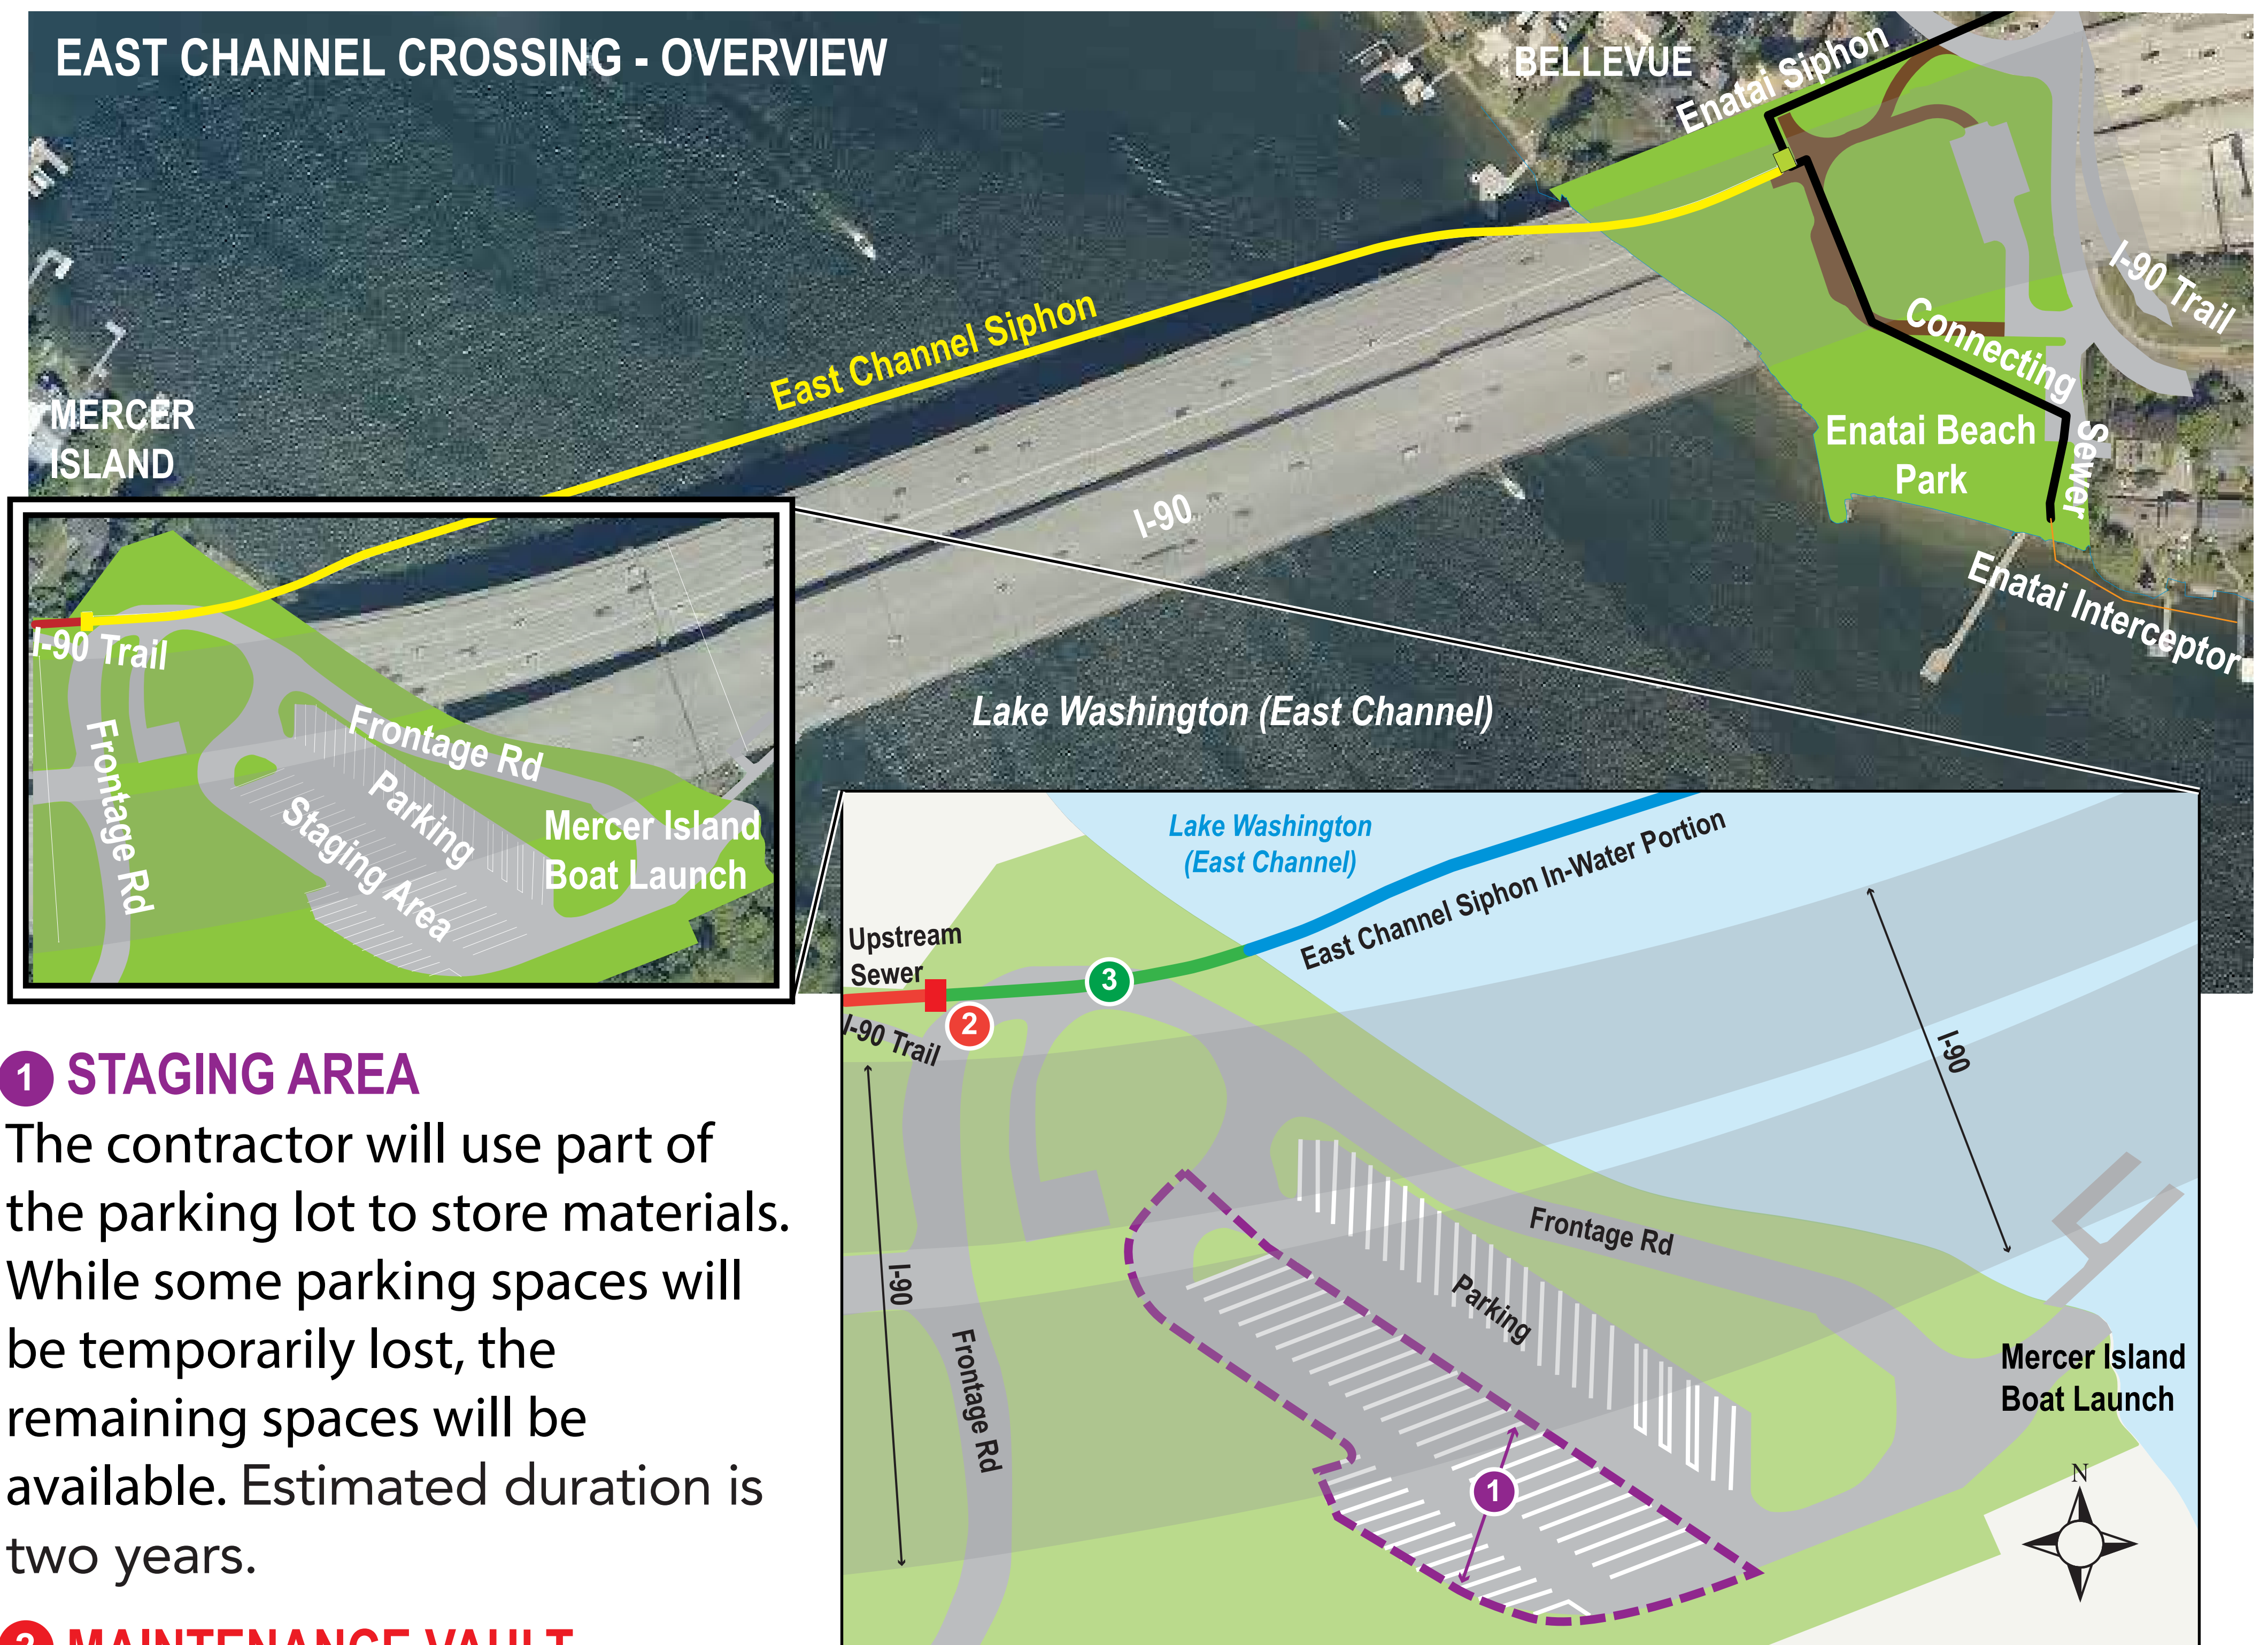

1 STAGING AREA

The contractor will use part of the parking lot to store materials. While some parking spaces will be temporarily lost, the remaining spaces will be available. Estimated duration is two years.

2 MAINTENANCE VAULT

A vault for future maintenance access will be installed adjacent to the frontage road. Flaggers will direct traffic when intermittent access for construction equipment across the frontage road is required. Estimated duration is three months.

3 FRONTAGE ROAD

Siphon pipe installation in the frontage road will take about two weeks. One lane of traffic will be maintained, with traffic control at all times. This work will take place outside peak boating season. A concrete bulkhead will be removed and replaced with anchored logs and plantings for shoreline protection. Work outside the roadway, including restoration, will take about three months.